



resideo

Installation is Easy

- Label wires and remove your old thermostat
- Install and wire your new thermostat
- Set your new thermostat to match your heating/cooling system
 - This thermostat works with virtually all System Types
 - It is preset for the most common system



We are here to help.
 Call 1-800-468-1502 for wiring assistance before returning the thermostat to the store.

This thermostat works on 24 volt or 750 mV systems. It will NOT work on 120/240 Volt systems.




Quick Start Guide
Programmable Thermostat
 RTH7400/RTH7500, RET97 Series



5 Mount Wallplate


Mount the new wallplate using the included screws and anchors.

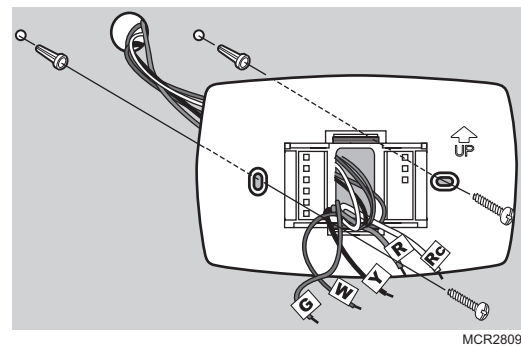

Drill 3/16-in. holes for drywall
 Drill 7/32-in. holes for plaster

6 Connect Wires


Simply match wire labels.

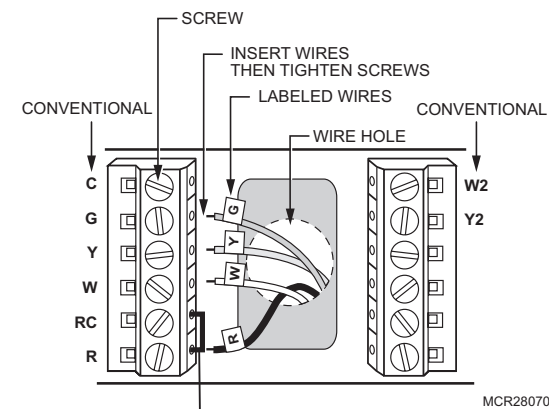

Remove metal jumper if you have both R and Rc wires.


Labels don't match? See Wiring Notes (over).
 Have a Heat Pump system? See Wiring Notes (over).
 Call 1-800-468-1502 for wiring assistance.

1 Turn OFF Power to Heating/Cooling System

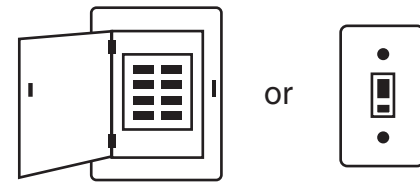



2 Remove Old Thermostat

Remove old thermostat but leave wallplate with wires attached.

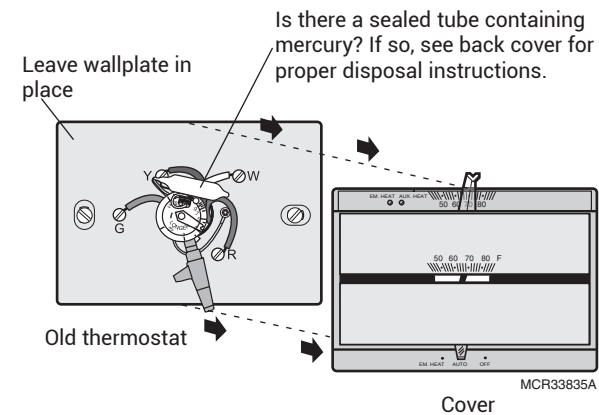

7 Install Batteries

Install two AA alkaline batteries and remove tab.

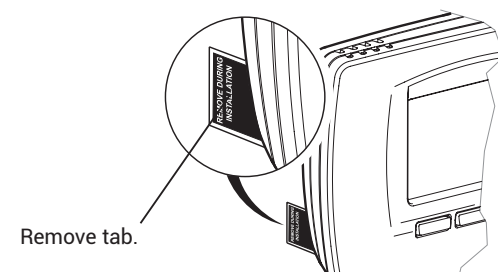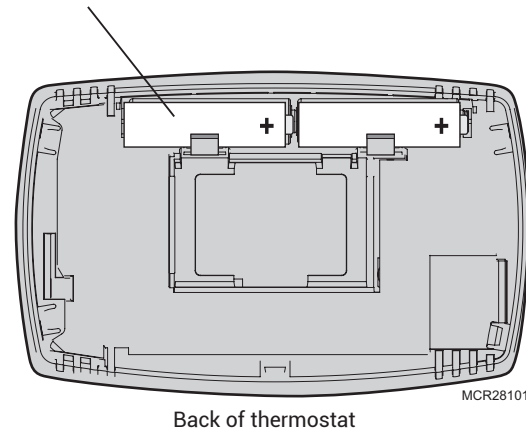


3 Label Wires with Tags

Label the wires using the supplied wire labels as you disconnect them, then remove the old wallplate.

Wiring Labels	Étiquettes de fils	Rótulos para los cables
Apply these wiring labels to each wire with the appropriate terminal designation as you remove it from the existing thermostat.	Lorsque vous retirez les fils des bornes du thermostat existant, collez ces étiquettes sur chaque fil correspondant à la lettre de la borne.	Coloque estos rotulos, con la designación de las terminales, en cada cable al remover los cables del termostato actual.
B B Y2 Y2 C C E E F F		
G G H H L L O O P P		
R R RC RC RH RH T T U U		
VVR VVR W W1 W1 W2 W2 W3 W3		
X X X1 X1 X2 X2 Y Y Y1 Y1		
ALX ALX		


Wire color might not match labels.

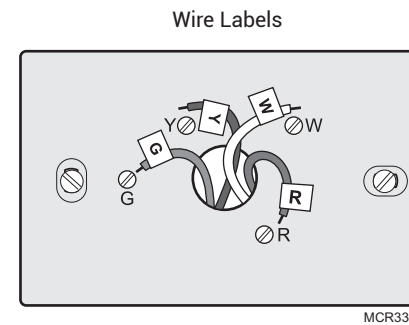

NOTE: Jumper wire used on old thermostat? If yes, note what letters the jumper connected and review in wiring section.


8 Install Thermostat onto Wallplate

Install thermostat onto the wallplate on the wall.

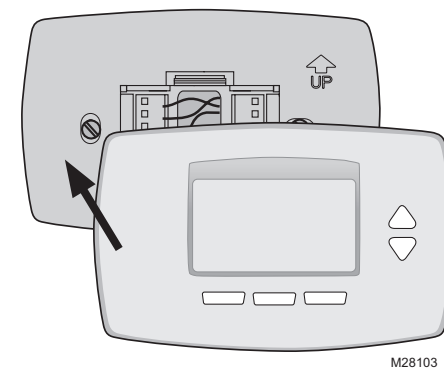


9 Turn Power Back ON

Turn the power back on to the heating/cooling system.

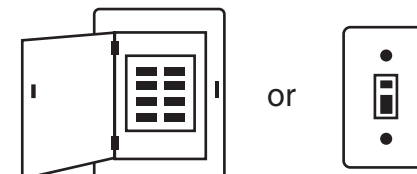


4 Separate Wallplate from New Thermostat

Remove wallplate from the new thermostat.

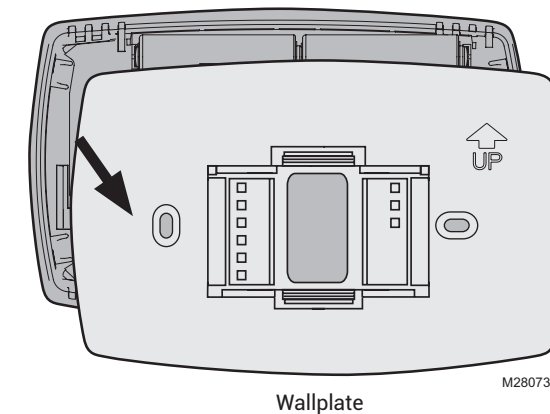


10 Set Time and Date

Press ▲ or ▼ to set month, then press NEXT.
 Press ▲ or ▼ to set day, then press NEXT.
 Press ▲ or ▼ to set year, then press DONE.

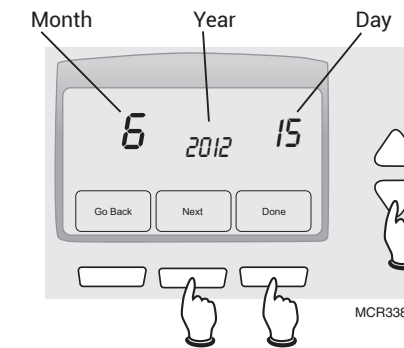

Press ▲ or ▼ to set time, then press DONE to save and exit.

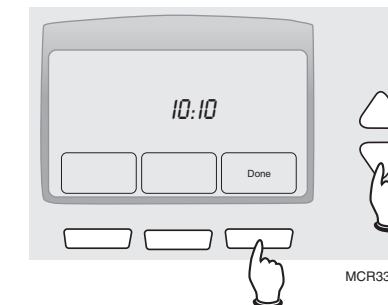

! This thermostat contains a Lithium battery which may contain Perchlorate material. Perchlorate Material—special handling may apply. See www.dtsc.ca.gov/hazardouswaste/perchlorate

! **MERCURY NOTICE:** Do not place your old thermostat in the trash if it contains mercury in a sealed tube. Contact the Thermostat Recycling Corporation at www.thermostat-recycle.org or 800-238-8192 for information on how and where to properly and safely dispose of your old thermostat.

! **CAUTION:** To avoid possible compressor damage, do not run air conditioner if the outside temperature drops below 50°F (10°C).

resideo
 Resideo Technologies, Inc.
 1985 Douglas Drive North, Golden Valley, MN 55422
 1-800-468-1502
www.resideo.com
 © 2020 Resideo Technologies, Inc. All rights reserved.
 This product is manufactured by Resideo Technologies, Inc. and its affiliates.

11 If your system type is...

If your system type is:

- Single Stage Heat and Cool

Congratulations, you're done!

Thermostat is set with energy saving schedule; see operating manual to adjust schedule.

If your system type is:

- Multistage Heat and Cool
- Heat Pump* without Backup Heat
- Heat Pump* with Backup Heat
- Heat Only
- Cool Only


Continue to step 12a to match your thermostat to your system type.

*Heat Pump—an air conditioner that provides cooling in the summer, and also runs in reverse in the winter to provide heating.


If you are not sure of your system type or if you have other questions, call us toll-free at 1-800-468-1502.

12a System Setup

Step 1
Press and release the left button.




Step 2
Press and hold the center button until the screen changes (approximately 5 seconds).



NOTE: Some functions may not appear due to thermostat model or previous selections made.

Step 3

- Press ▲ ▼ to change setting.
- Press NEXT to advance to next function.
- Press DONE to save & exit.

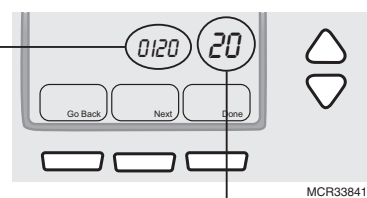

Function	Settings & Options
0120* Year Setting (first two digits)	20 = Year 20xx 21 = Year 21xx
0130* Year Setting (second two digits)	01 - 99 (i.e., 2001 - 2099)
0140* Month Setting	01 - 12 (i.e., January - December)
0150* Date Setting	01 - 31
0170 Select System Type	<ol style="list-style-type: none"> Heat/cool: Gas, oil or electric heating <u>with</u> central air conditioning. Heat pump: Heat pump <u>without</u> backup or auxiliary heat. Heat only: Gas, oil or electric heat <u>without</u> central air conditioning. Heat only with fan: Gas, oil or electric heat <u>without</u> central air conditioning. Hot water heat only (no fan): Gas, oil or hot water heat <u>without</u> central air conditioning. Cool only: Central air conditioning only. Heat pump: Heat pump <u>with</u> backup or auxiliary heating. Heat/Cool Multiple stages: 2 heat stages (wires on W and W2), 2 cooling stages (wires on Y and Y2). Heat/Cool Multiple stages: 2 heat stages (wires on W and W2), 1 cooling stage (wire on Y). Heat/Cool Multiple stages: 1 heat stage (wire on W), 2 cooling stages (wires on Y and Y2).
0180 Heating Fan Control	<ol style="list-style-type: none"> Gas or oil heat: Use this setting if you have a gas or oil heating system (system controls fan operation). Electric heat: Use this setting if you have an electric heating system (thermostat controls fan operation).
0190 Heat Pump Changeover Valve (for heat pumps only)	<ol style="list-style-type: none"> Cooling changeover valve: Use this setting if you connected a wire labeled "O" to the O/B terminal (see page 22). Heating changeover valve: Use this setting if you connected a wire labeled "B" to the O/B terminal (see page 23).
0240 Heating Cycle Rate	<ol style="list-style-type: none"> Gas or oil furnace: Standard gas/oil furnace (less than 90% efficiency). Electric furnace: Electric heating systems. Hot water or high-efficiency furnace: Hot water system or gas furnace (more than 90% efficiency). Gas/oil steam or gravity system: Steam or gravity heat systems. <p>Settings 5, 9, 3, or 1 recommended. Other settings: 2, 4, 6, 7, 8, 10, 11, 12.</p> <p>The number indicates how frequently the system cycles on and off to maintain the set temperature. A higher number means the system is on and off for shorter amounts of time, a lower number means longer on and off times. When these settings are set to match the system type, the thermostat controls temperature more accurately.</p>
0270 Emergency Heat Cycle Rate (heat pumps only)	Settings 5, 9, 3, or 1 recommended. Other settings: 2, 4, 6, 7, 8, 10, 11, 12. <p>The number indicates how frequently the system cycles on and off to maintain the set temperature. A higher number means the system is on and off for shorter amounts of time, a lower number means longer on and off times. When these settings are set to match the system type, the thermostat controls temperature more accurately.</p>

*Functions set in Step 10.

12b Preferences (optional)

Use the Setup and Navigation steps in 12a to set Display Preferences.


Function	Settings & Options
0300 Manual/Auto Changeover	<ol style="list-style-type: none"> Manual changeover (Heat/Cool/Off). Automatic changeover (Heat/Cool/Auto/Off). Automatically turns on Heat or Cool based on room temperature. Note: System maintains minimum 3°F difference between heat and cool settings.
0320 Temperature Format (°F/°C)	<ol style="list-style-type: none"> Fahrenheit Celsius
0330 Daylight Saving Time On/Off	<ol style="list-style-type: none"> Off: No adjustment for daylight saving time. On: Auto-change to daylight saving time (for areas that <u>do not</u> use the new 2007 DST calendar). On: Auto-change to daylight saving time (2007 and beyond, for areas that use the new 2007 DST calendar).
0500 Furnace Filter Change Reminder	<ol style="list-style-type: none"> Off (no reminder) Reminder in about 1 month Reminder in about 3 months Reminder in about 6 months Reminder in about 9 months Reminder in about 1 year Reminder in about 3 years
0530 Smart Response® Technology	<ol style="list-style-type: none"> On Off
0600 Maximum Heat Temperature Limit (select models only)	90°F (other options: 40-89°F [4-32°C])
0610 Minimum Cool Temperature Limit (select models only)	50°F (other options: 51-99°F [11-37°C])
0640 Clock Format	<ol style="list-style-type: none"> 12 12-hour clock (i.e., "3:30 pm") 24 24-hour clock (i.e., "15:30")

Wiring Notes

Conventional system

Alternate wiring (conventional systems)

- Remove metal jumper connecting R and Rc only if you must connect both R and Rc wires.
- If your old thermostat had both R and RH wires, remove metal jumper. Connect the R wire to the Rc terminal, and the RH wire to the R terminal.
- If your old thermostat had only 1 C or C1 wire, connect it to the C terminal. If your old thermostat had 2 C or C1 wires, wrap each separately with electrical tape and do not connect them.

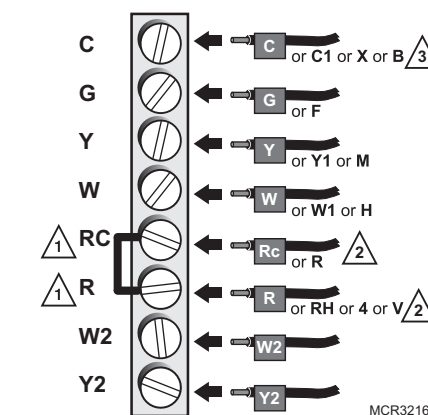


Heat pump

Connect wires: Heat Pump

- Match each labeled wire with same letter on new thermostat.
- Use a screwdriver to loosen screws, insert wires into hole under screw, then tighten screws until wire is secure.
- If E and Aux do not each have a wire connected, use a small piece of wire to connect them to each other.
- Push any excess wire back into the wall opening.


Labels don't match?

If labels do not match letters on thermostat, see Alternate wiring (heat pump system only)

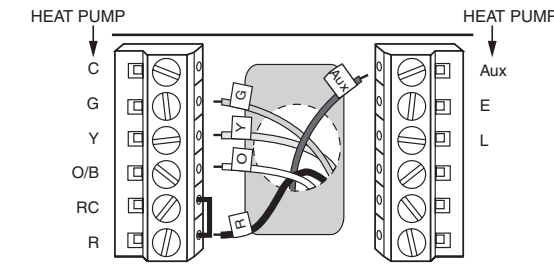

Alternate wiring (heat pump system only)

- Leave metal jumper in place, connecting R & Rc terminals.
- If your old thermostat had both V and VR wires, stop now and contact a qualified contractor for help.
- If your old thermostat had separate O and B wires, attach the B wire to the C terminal. If another wire is attached to the C terminal, stop now and contact a qualified contractor for help.
- If your old thermostat had Y1, W1 and W2 wires, stop now and contact a qualified contractor for help.
- If L terminal is used, C terminal wire must be connected (contact a contractor if there is no C wire).
- If E and Aux terminals do not each have a wire connected, use a small piece of wire to connect them to each other.

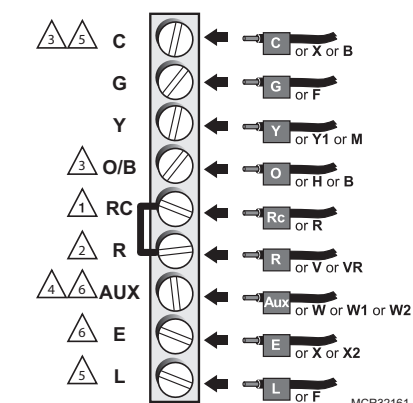

Customer assistance

For assistance with this product, please visit customer.resideo.com or call Customer Care toll-free at 1-800-468-1502.